

FLEXSHADE PANELS

FLEXSHADE fixed frame panels provide sunlight filtration at a lower cost than operable solutions. They are particularly well suited for skylights and sloped glazing in solariums or odd-shaped openings. (Not suitable for curved framing).

Use FLEXSHADE PANELS to help prevent ultraviolet damage to expensive textiles and furniture located in direct sunlight. Relieve the discomfort from solar heat and glare often associated with unprotected glazing.

Although SUNSCREEN® is the standard fabric offered, FLEXSHADE PANELS can utilize almost any of DRAPER's mesh fabrics, permanently attached to lightweight aluminum frames. A wide range of openness factors are available, ranging from 3% to 23%. (PW4800 is not suitable for FLEXSHADE PANELS.)



Heavy Duty fixed panels utilize an extruded aluminum frame. Frames are available in dark bronze, white, or mill finish aluminum.

Panels mount easily on surface or within framing of windows with clips (See details below). Clips allow removal of FLEXSHADE PANELS for routine maintenance and cleaning.

Available in sizes up to 5' x 10'. Panels exceeding 40" in length require a center support member.

Installation of Interior FlexShade Panels


Frame cross-section Typical FlexShade Panel

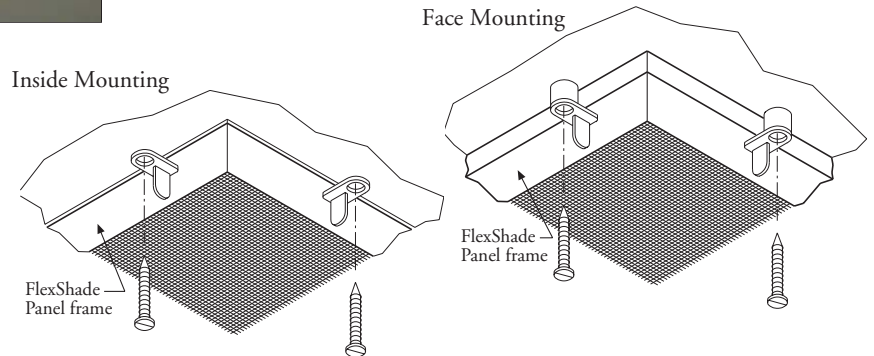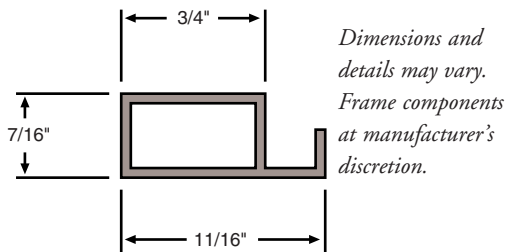

Installation of Exterior FlexShade Panels

FLEXSHADE PANELS for exterior usage are easy to install. Install mounting channels first. Then, slide fixed panel in from lower end. Install keeper track to secure panel in frame. At maintenance time, simply remove the bottom keeper, and slide out the fixed panel.

SunScreen® SW1000 by Phifer—For reducing solar heat gain in the summer and heat loss in the winter. SunScreen may be installed on the exterior or interior of glass areas. SW1000 is a woven vinyl-coated fiberglass screening with an approximate openness factor of 23%. All seven colors in stock. Not shown: SW1050 Gold.

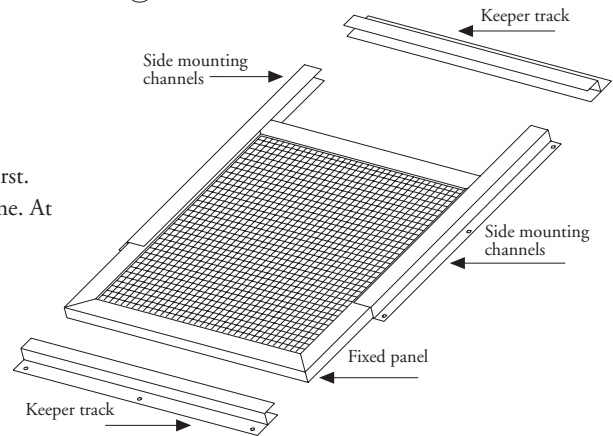

White
SW1005



Antique White
SW1010



Silver Grey
SW1020



Bronze
SW1030



Dark Bronze
SW1040



Charcoal
SW1060